



Standards

EN140: 1998 Mask Body
EN14387: 2004 + A1: 2008 ABEK1
CE 2797 - UKCA 0086

Efficiency

At 1000 ppm:
Cyclohexane (C₆H₁₂) > 70 minutes
Chlorine (Cl₂) > 20 minutes
Hydrogen sulphide (H₂S) > 40 minutes
Hydrogen cyanide (HCN) > 25 minutes
Sulphur dioxide (SO₂) > 20 minutes
Ammonia (NH₃) > 50 minutes

Weight

Mask + Filter: net (S/M) 322 g; (M/L) 328 g
gross (S/M) 423 g; (M/L) 435 g
Filter: net 115 g each; both net 230 g, gross 253 g

Shelf Life

5 years (mask & filters) See storage conditions on Instructions for Use.
Filters are re-usable and changeable.

Material


- Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- Filters:** Activated carbon sealed into a ABS Shell.

Production

United Kingdom

Structure to help airflow diffusion and full usage of the activated carbon

Activated carbon treated for gas adsorption

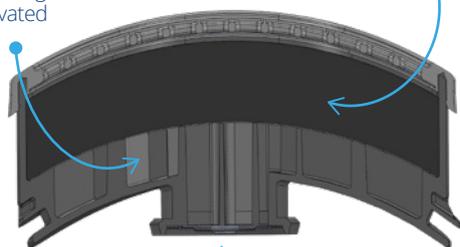

Inhalation valve

Code	Description	Quantity
SPR487 (S/M) SPR488 (M/L)	ABEK1 Reusable Half Mask for multiple Gases and Vapours	8 pcs. per box
SPR489	ABEK1 Replacement filters	5 sets of 2 pcs. per box
SPM009	Elipse High efficiency Mask Carry Case (Belt holder)	10 sets per box
SPR523	Cases for P3 filters	15 sets of 2 pcs. per box
SPM524	Pair of P3 filters	15 sets of 2 pcs. per box

Applications - Universal gases, dust, mist and fumes

Type



Protection

A organic gases and vapours with a boiling point above 65°C
B inorganic gases and vapours (excluding carbon monoxide)
E sulphur dioxide and other acidic gases and vapours
K ammonia and organic ammonia derivatives

