




H: 178 mm D: 130 mm W: 166 mm



H: 97 mm D: 11 mm W: 53 mm

Encapsulation (patented technology)
total length of 645 mm media in each filter

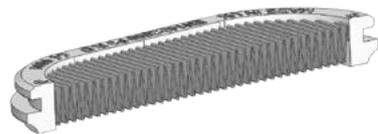

Standards

Facemask EN 136:1998 Class 1
EN166:2001 Class 1 & K (anti-scratch)
Particle filter EN 143:2021 P3
100% of filters NaCl Tested

Efficiency

P3 >99,95% for 0,3 μ particulate

Weight

Mask + Filters: 400 g
Filters: 50 g

Shelf Live

5 years (mask & filters) See storage conditions on Instructions for Use. Filters are re-usable and changeable.



Material

- Inner mask body in Medical Grade TPE
- Visor in polycarbonate overmolded with silicone frame
- Headband in silicone
- Covers in PE
- Valve body in nylon with silicone diaphragms
- Filters in mechanical type multi-layer HESPA Synthetic media with TPE flexible overmolded / encapsulated

Part #	Description
FFM2243	Elipse® Full Face P3 Respirator Package also includes: ■ Replaceable filters
SPR316	Elipse® P3 Replacement Filters Pair
SPM1001	Elipse® Full Face Carry Case
SPM1002	Elipse® Full Face Face Face Fit Test
SPM1003	1 pc Tearoff Kit

Applications



Welding and Grinding: Metal Fumes and Dust.



Constructions: Silica Dust, Asbestos, Concrete Dust, Stone Dust, Aggregate Dust, Wood Dust, Cement Dust, Mold.



Manufacturing: Glass Fibers, Composite Fibers, Lead Fumes.



Mining: Coal Dust, Silica Dust.



Food Industry: Poultry, Powders (Dairy), Spices, Grain Dust.



Pharmaceutical: Powders, Viruses, Bacteria.